

# FENDERS

Made in the USA

The Best Custom Boat Lines  
 DenverRope.com  
 303-809-7274  
 John@DenverRope.com



## F SERIES

Unique one-piece construction—  
 made the original way

The largest size range and colors available

Best selling heavy duty fender

- Wide range of sizes to suit any vessel
- Unique vinyl valve seals securely
- Even wall thickness for maximum strength and durability
- Multiple ribbed reinforced rope holds
- Twin-eye design for vertical or horizontal use
- Designed for use in permanent unprotected moorings, pilings, locks and concrete walls
- F Series fenders are available with black, white, or gray rope holds by special order. Minimum quantities apply, please contact customer service for details.
- For boats 20 ft. to 70+ ft. in length

## SPECIFICATIONS

	DIAMETER	LENGTH	EYE DIAMETER	VOLUME	BOAT SIZE
F-1	6" [61,0cm]	24" [15,2cm]	0.7" [18,cm]	1.9 gal. [7.1 L]	20'-30' [6.0-9.1m]
F-02	7.5" [66,0cm]	26" [19,1cm]	0.7" [18,cm]	3.1 gal. [11.8 L]	20'-30' [6.0-9.1m]
F-2	8.2" [63.5cm]	25" [20,8cm]	0.9" [23,cm]	4.3 gal. [16.3 L]	20'-30' [6.0-9.1m]
F-3	8.2" [76.2cm]	30" [20,8cm]	0.9" [23,cm]	5.4 gal. [20.4 L]	20'-30' [6.0-9.1m]
F-4	8.5" [102.9cm]	40.5" [21,6cm]	0.9" [23,cm]	7.7 gal. [29.3 L]	30'-40' [9.1-12.2m]
F-5	11" [76,2cm]	30" [27,9cm]	1.0" [25,cm]	7.3 gal. [27.7 L]	30'-40' [9.1-12.2m]
F-6	11" [106,7cm]	42" [27,9cm]	1.0" [25,cm]	15.1 gal. [57.0 L]	30'-40' [9.1-12.2m]
F-7	15" [104,1cm]	41" [38,1cm]	1.0" [25,cm]	18.8 gal. [71.0 L]	40'-50' [9.1-12.2m]
F-8	15" [147,3cm]	58" [38,1cm]	1.0" [25,cm]	39.6 gal. [149.9 L]	60'-70' [18.2-21.3m]
F-10	18" [127,0cm]	50" [45,7cm]	1.0" [25,cm]	33.8 gal. [128.0 L]	60'-70' [18.2-21.3m]
F-11	21.2" [146,1cm]	57.5" [53,8cm]	1.1" [27,cm]	63.7 gal. [241.1 L]	70' & up [21.3 & up]
F-13	29" [194,3cm]	76.5" [73,7cm]	1.2" [30,cm]	158.6 gal. [600.4 L]	70' & up [21.3 & up]



DUAL VALVE SYSTEM on the F-13:  
 "AIR IN" for easy inflation.  
 "AIR OUT" for easy deflation  
 and storage.

## F SERIES ORDERING INFORMATION

	STANDARD COLOR SKUS				NON-STANDARD COLOR SKUS*			
	WHITE	BLUE	GRAY	FOREST GREEN	TEAL	NAVY	COBALT BLUE	BLACK
F-1	82-432-076	65-186-081	32-968-418	43-655-365	31-698-427	63-548-275	25-029-497	38-429-986
F-02	91-318-700	91-210-601	50-220-083	INQUIRE	INQUIRE	72-138-262	09-032-321	45-488-161
F-2	94-211-739	29-840-825	35-425-823	08-292-183	85-046-334	80-599-873	18-437-546	40-488-138
F-3	83-518-187	67-934-725	36-363-061	65-555-597	73-921-950	23-755-842	98-799-490	64-442-100
F-4	82-633-511	42-002-884	81-341-222	01-019-743	26-252-983	02-130-673	56-994-604	72-249-881
F-5	51-654-951	49-958-248	79-313-752	27-549-608	67-349-146	72-947-783	31-619-526	80-923-911
F-6	20-997-926	48-331-218	03-967-365	05-528-087	64-716-068	27-029-368	97-270-956	91-471-931
F-7	61-633-059	68-917-413	31-775-800	91-491-561	52-774-316	23-611-558	87-375-277	24-367-435
F-8	24-582-243	33-103-940	58-486-316	INQUIRE	INQUIRE	34-348-569	63-390-760	28-292-760
F-10	45-268-619	60-234-782	07-450-643	INQUIRE	78-726-511	INQUIRE	63-514-542	03-215-361
F-11	37-453-829	27-077-003	72-341-009	INQUIRE	INQUIRE	INQUIRE	01-770-224	12-856-867
F-13	55-785-521	09-347-774	78-673-179	INQUIRE	INQUIRE	INQUIRE	INQUIRE	54-719-310

\*Minimum quantities apply, please contact customer service for details.





The classic center tube design allows for hanging vertically or horizontally

Reinforced tube ends and ribs add strength and durability

## HTM SERIES



- Useful protection against pilings and other awkward docking situations
- Ribs for extra strength and stability
- High gloss finish
- Wide range of colors
- Designed for medium-duty use in both permanent protected and unprotected moorings
- For boats 20 ft. to 50 ft. in length

### SPECIFICATIONS

	DIAMETER	LENGTH	TUBE DIAMETER	VOLUME	BOAT SIZE
HTM-1	6.3" [16,0cm]	15.5" [39,4cm]	0.625" [16,cm]	1.8 gal. [6.9 L]	20' -30' [6.0-9.1m]
HTM-2	8.5" [21,6cm]	20.5" [52,1cm]	0.625" [16,cm]	4.7 gal. [17.9 L]	20' -30' [6.0-9.1m]
HTM-3	10.5" [26,7cm]	27" [68,6cm]	0.625" [16,cm]	9.2 gal. [35.0 L]	30' -40' [9.1-12.2.1m]
HTM-4	13.5" [34,3cm]	34.8" [88,4cm]	0.625" [16,cm]	15.6 gal. [59.0 L]	30' -50' [12.2-15.2m]

### HTM SERIES ORDERING INFORMATION

#### STANDARD COLOR SKUS


	WHITE	SAND	GRAY	FOREST GREEN	TEAL	BLUE	NAVY	COBALT BLUE	BURGUNDY	CLASSIC RED	BLACK
HTM-1	53-672-247	29-279-958	09-301-769	38-923-343	23-488-544	10-377-440	84-191-044	66-407-263	20-287-231	18-643-066	79-751-374
HTM-2	20-953-038	07-834-817	30-612-892	23-684-762	45-580-510	16-436-415	55-715-148	95-396-458	15-460-041	89-237-529	84-065-681
HTM-3	70-051-909	69-191-961	32-520-460	01-469-416	64-314-958	03-088-059	01-583-952	85-083-220	28-678-786	49-671-390	39-149-388
HTM-4	85-236-514	34-539-331	64-282-594	69-619-861	90-910-254	30-347-203	83-699-446	29-047-402	81-572-597	08-800-099	24-890-772

#### NON-STANDARD COLOR SKUS\*

	GREEN	YELLOW	ORANGE	RED
HTM-1	37-287-747	72-688-719	45-898-118	50-287-341
HTM-2	37-060-060	06-719-571	01-501-670	76-278-255
HTM-3	07-206-685	16-659-866	02-636-580	79-821-846
HTM-4	81-966-140	23-560-621	03-535-506	82-716-902

\*Minimum quantities apply, please contact customer service for details.

### FENDERING TIP

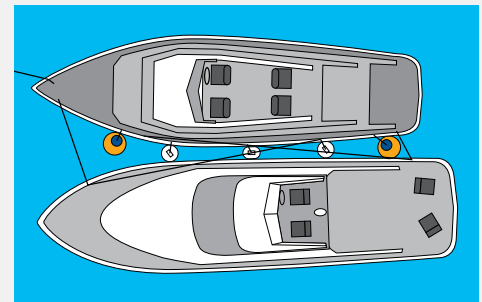

**RAFTING:** The best technique is to have the fenders in place on the moored boat. Group three standard fenders closely at maximum beam, then position two round buoys (As or LDs) fore and aft to provide greater protection.

# FENDERS

Made in the USA

The Best Custom Boat Lines  
 DenverRope.com  
 303-809-7274  
 John@DenverRope.com



# G

Polyform's most popular utility fender  
 The standard for small boats  
 Large range of colors available

- Hang vertically or horizontally
- Reinforced rope holds
- Ribs for extra strength and stability
- High gloss finish
- Wide range of colors
- For boats 10 ft. to 40 ft. in length

## SPECIFICATIONS

	DIAMETER		LENGTH		EYE DIAMETER		VOLUME		BOAT SIZE	
G-1	3.5"	[8,9cm]	12.8"	[32,5cm]	0.375"	[1,0 cm]	0.4 gal.	[1.6 L]	Up to 10'	[Up to 3 m]
G-2	4.5"	[11,4cm]	15.5"	[39,4cm]	0.50"	[1,3 cm]	0.7 gal.	[2.8 L]	10'-15'	[3-4.5 m]
G-3	5.5"	[14,0cm]	19"	[48,3cm]	0.625"	[1,6 cm]	1.4 gal.	[5.3 L]	15'-20'	[4.5-6.1 m]
G-4	6.5"	[16,5cm]	22"	[55,9cm]	0.75"	[1,9 cm]	2.2 gal.	[8.3 L]	20'-25'	[6.1-7.6 m]
G-5	8.8"	[22,4cm]	26.8"	[68,1cm]	0.75"	[1,9 cm]	5.1 gal.	[19.3 L]	25'-35'	[7.6-10.6 m]
G-6	11"	[27,9cm]	30"	[76,2cm]	0.875"	[2,2 cm]	8.5 gal.	[32.1 L]	35' -40'	[106-12.2 m]

## G SERIES ORDERING INFORMATION

STANDARD COLOR SKUS


	WHITE	SAND	GRAY	FOREST GREEN	TEAL	BLUE	NAVY	COBALT BLUE	BURGUNDY	CLASSIC RED	BLACK
G-1	68-323-692	66-854-288	85-766-746	92-206-044	52-805-786	05-117-533	14-561-984	39-945-143	94-643-715	73-299-793	27-905-528
G-2	45-162-056	47-538-137	61-344-827	96-985-316	24-609-402	04-271-298	50-143-630	62-647-465	44-927-434	22-487-107	06-198-906
G-3	83-408-891	25-421-919	33-939-351	73-030-171	73-383-112	39-849-422	51-812-686	57-553-272	82-095-487	65-458-809	73-389-943
G-4	63-267-743	08-511-282	75-891-521	71-537-490	04-954-067	44-714-290	54-581-167	49-272-515	25-707-693	05-415-359	22-830-435
G-5	41-639-559	79-178-789	43-628-373	14-443-278	11-023-976	74-434-019	13-838-982	12-964-872	94-151-787	52-819-023	49-941-328
G-6	41-137-889	60-800-418	97-402-565	59-562-690	55-308-827	65-871-829	36-980-555	56-792-454	59-292-624	26-006-803	71-201-180

NON-STANDARD COLOR SKUS\*

	GREEN	YELLOW	ORANGE	RED
G-1	51-733-188	31-083-941	08-490-110	32-159-388
G-2	63-087-232	80-491-212	80-653-132	37-893-418
G-3	24-634-229	53-614-311	29-576-912	88-645-954
G-4	54-952-206	47-311-724	80-991-743	92-590-356
G-5	29-481-175	29-535-900	87-219-963	84-666-834
G-6	41-011-403	53-257-643	33-862-436	56-494-026

\*Minimum quantities apply, please contact customer service for details.

FENDERING TIP

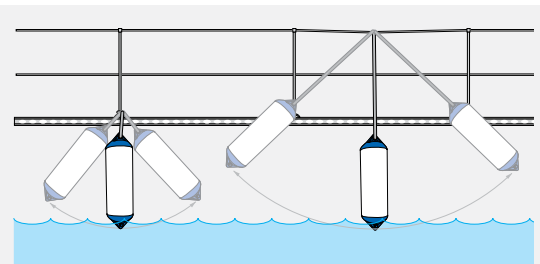

**HANGING FENDERS:**  
 Always hang fenders so they just touch the surface of the water. Tie them off on something solid and as low as possible on the boat. This prevents them from swinging in a wide arc and ending up on top of the dock.



# FENDERS

The ultimate utility fender with thicker wall construction  
 Reinforced rope holds and ribs add strength and durability

**NF**  
 SERIES



- Hang vertically or horizontally
- Reinforced rope holds
- Ribs for extra strength and stability
- High gloss finish
- Wide range of colors
- For boats 10 ft. to 35 ft. in length

## SPECIFICATIONS

	DIAMETER	LENGTH	EYE DIAMETER	VOLUME	BOAT SIZE
NF-3	5.6" [1,3 cm]	19" [48,3 cm]	0.625" [1,6 cm]	1.3 gal. [5.1 L]	Up to 20' [Up to 6.1 m]
NF-4	6.4" [16,2 cm]	21.6" [54,9 cm]	0.75" [1,9 cm]	2.1 gal. [8.1 L]	20' -25' [6.1-7.6 m]
NF-5	8.9" [22,5 cm]	26.8" [67,9 cm]	0.75" [1,9 cm]	5.2 gal. [19.5 L]	25' -35' [7.6-10.6 m]

## NF SERIES ORDERING INFORMATION

### STANDARD COLOR SKUS


	WHITE	SAND	GRAY	FOREST GREEN	TEAL	BLUE	NAVY	COBALT BLUE	BURGUNDY	CLASSIC RED	BLACK
NF-3	81-592-975	29-896-382	81-184-097	76-775-021	INQUIRE	53-539-959	22-686-327	48-301-016	04-926-237	69-089-015	23-814-605
NF-4	10-901-104	17-068-419	10-093-606	35-761-159	INQUIRE	76-962-808	74-222-705	76-266-280	24-731-187	42-803-090	89-101-410
NF-5	75-273-166	69-911-604	04-415-199	11-942-805	INQUIRE	78-624-913	99-325-109	84-227-957	38-641-388	79-482-439	75-105-008

### NON-STANDARD COLOR SKUS\*


	GREEN	YELLOW	ORANGE	RED
NF-3	INQUIRE	35-311-852	33-728-978	14-185-356
NF-4	25-827-620	10-719-338	57-552-391	70-167-222
NF-5	INQUIRE	INQUIRE	INQUIRE	61-784-622

\*Minimum quantities apply, please contact customer service for details.

FENDERING TIP

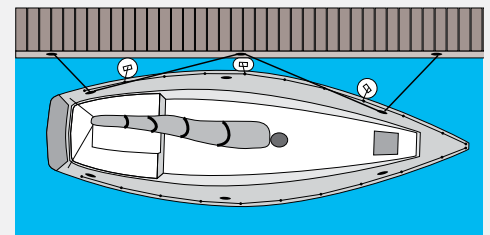

**DOCKING:**  
 Use at least three fenders when docking—one at maximum beam, one each fore and aft.

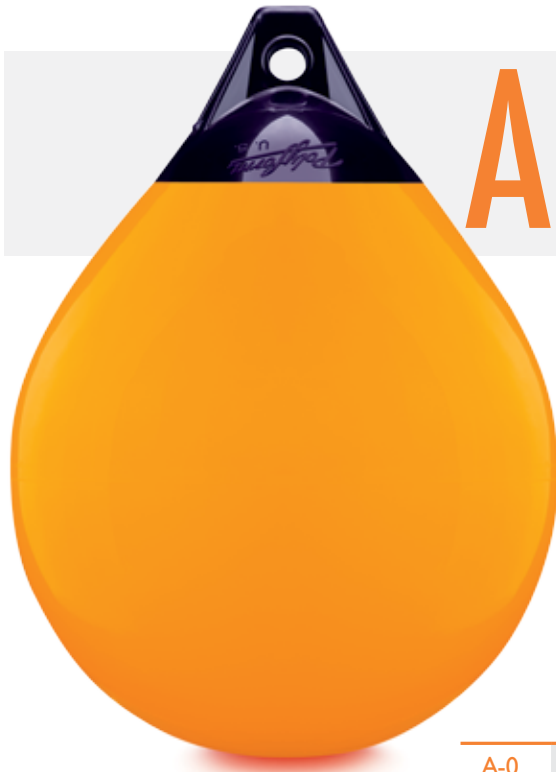

## A SERIES


The original one-piece construction buoy—  
made the original way

The #1 buoy in the world

- Even wall thickness for maximum strength and durability
- Polyform's unique vinyl valve system
- Dual valve inflation/deflation system for sizes A-5, A-6 and A-7
- Excellent choice for a rafting fender
- Offered in brilliant, high-visibility colors
- A Series buoys in sizes A-5, A-6, and A-7 are available with black, white, or gray rope holds by special order. Minimum quantities apply, please contact customer service for details.



All A Series buoys feature reinforced ribs in the rope holds for extra strength and durability.



DUAL VALVE SYSTEM on the A-5 through A-7: "AIR IN" for easy inflation. "AIR OUT" for easy deflation and storage.

	DIAMETER	LENGTH	EYE DIAMETER	VOLUME
A-0	8" [20,3 cm]	11.5" [29,2 cm]	0.6" [1,5 cm]	1.6 gal. [6.1 L]
A-1	11" [27,9 cm]	15" [38,1 cm]	1.0" [2,5 cm]	3.0 gal. [11.4 L]
A-2	14.5" [36,8 cm]	19.5" [49,5 cm]	1.125" [2,9 cm]	6.7 gal. [25.3 L]
A-3	17" [43,2 cm]	23" [58,4 cm]	1.125" [2,9 cm]	11.6 gal. [44.0 L]
A-4	20.5" [52,1 cm]	27" [68,6 cm]	1.125" [2,9 cm]	20.3 gal. [77.0 L]
A-5	27" [68,6 cm]	36" [91,4 cm]	1.25" [3,2 cm]	47.6 gal. [180.2 L]
A-6	34" [86,4 cm]	44" [111,8 cm]	1.5" [3,8 cm]	95.1 gal. [360.0 L]
A-7	39" [99,1 cm]	54" [137,2 cm]	2.0" [5,1 cm]	162.0 gal. [611.7 L]

### A SERIES ORDERING INFORMATION

STANDARD COLOR SKUS

	WHITE	BLUE	GREEN	SATURN YELLOW	YELLOW	ORANGE	RED
A-0	45-125-827	19-400-520	77-957-683	37-383-894	01-016-782	62-522-460	84-083-844
A-1	13-814-852	77-882-582	64-926-549	49-668-025	50-766-620	64-218-664	11-706-223
A-2	93-589-640	17-045-815	71-832-216	41-517-936	23-133-894	16-691-632	36-649-954
A-3	32-152-798	40-867-783	21-463-314	85-695-557	89-582-642	92-605-310	77-400-354
A-4	27-685-394	63-872-392	17-841-038	02-282-389	70-156-028	96-595-055	25-901-934
A-5	40-498-717	37-701-482	21-584-067	81-116-891	55-066-589	15-906-883	78-597-643
A-6	05-317-866	92-819-301	63-787-228	03-856-061	86-375-504	53-610-256	10-487-121
A-7	74-342-477	64-504-168	99-503-932	55-712-822	19-904-897	89-039-135	08-342-658



The original and best selling low drag buoy  
 One piece construction — ONLY one like it  
 More sizes, more features

## LD SERIES




- Unique shape makes pot retrieval easier
- LD reduces drag by as much as 80% compared to standard round buoys
- Great choice for any offshore fishing application
- Polyform's vinyl valve system maintains buoy inflation
- Even wall thickness for maximum strength and durability
- Heavy-duty reinforced rope hold
- Offered in seven high-visibility and fluorescent colors

	DIAMETER	LENGTH	EYE DIAMETER	VOLUME
LD-1	8.6" [21,8 cm]	19" [48,3 cm]	1.0" [2,5 cm]	3.0 gal. [11.4 L]
LD-2	11.5" [29,2 cm]	24" [61,0 cm]	1.0" [2,5 cm]	6.1 gal. [23.2 L]
LD-3	13.5" [34,3 cm]	29" [73,7 cm]	1.0" [2,5 cm]	10.8 gal. [40.7 L]
LD-4	15.5" [39,4 cm]	37" [94,0 cm]	1.0" [2,5 cm]	19.2 gal. [72.5 L]


## LD SERIES ORDERING INFORMATION

STANDARD COLOR SKUS

	WHITE	BLUE	GREEN	SATURN YELLOW	YELLOW	ORANGE	RED
LD-1	47-491-288	79-542-219	42-924-089	91-805-272	30-128-747	03-359-560	46-282-515
LD-2	90-348-244	29-963-728	59-999-842	01-888-104	91-458-905	09-170-845	77-499-866
LD-3	27-229-804	03-681-934	56-718-586	29-037-312	52-865-069	78-815-744	29-804-588
LD-4	53-929-790	60-074-497	15-496-097	68-898-380	67-330-161	52-048-189	60-878-843

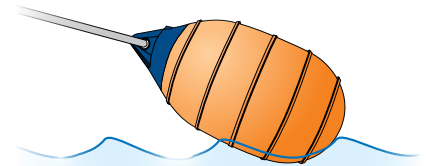

Unique shape and rib design lower drag and allow the buoy to "skip" along the surface upon retrieval.

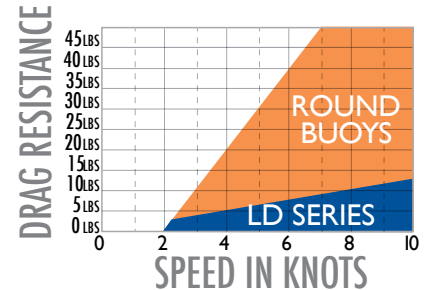

## FENDERING INFORMATION

BOAT SIZE	FENDERSELECTION
Up to 20' [Up to 6.0 m]	A-0
20' – 30' [6.0 - 9.1m]	A-1, LD-1
30' – 40' [9.1 - 12.2m]	A-2, LD-2
40' – 50' [12.2 - 15.2m]	A-3, LD-3
50' – 60' [15.2 - 18.3m]	A-4, LD-4
60' – 70' [18.3 - 21.3m]	A-5
70' & up [21.3m & up]	A-5, A-6, A-7

A and LD Series buoys can be used as fenders on boats as well.

Fender covers for the A Series are available on page 11.



## CC SERIES


The original plastic bar & mooring buoy  
 Can be used in a variety of applications

- Polyform's unique vinyl valve system
- Even wall thickness for maximum strength and durability
- Reinforced flexible center tube
- Useful in a variety of applications:
  - Offshore fishing
  - Oceanic research equipment
  - Fish farming
  - Mooring buoy

The CC Series is available in six sizes in either red or white.

### STANDARD COLOR SKUS

	DIAMETER	LENGTH	TUBE DIAMETER	VOLUME	SCHEDULE 40 PVC RPE	STANDARD COLOR SKUS	
						WHITE	RED
CC-1	10.5" [26,7 cm]	13" [33,0 cm]	1.5" [3,8 cm]	3.1 gal. [11.8 L]	1.25" ID 1.660" OD	CC-1	52-119-654 33-359-080
CC-2	14" [35,6 cm]	16.5" [41,9 cm]	2.0" [5,1 cm]	6.1 gal. [23.2 L]	1.5" ID 1.900" OD	CC-2	33-754-099 51-072-194
CC-3	17" [43,2 cm]	21" [53,3 cm]	2.0" [5,1 cm]	12.6 gal. [47.6 L]	1.5" ID 1.900" OD	CC-3	29-558-783 05-192-965
CC-4	20" [50,8 cm]	25.5" [64,8 m]	2.0" [5,1 cm]	18.3 gal. [69.2 L]	1.5" ID 1.900" OD	CC-4	38-727-323 52-864-789
CC-5	27" [68,6 cm]	32.8" [83,3 cm]	3.0" [7,6 cm]	44.9 gal. [170.0 L]	2.5" ID 2.875" OD	CC-5	42-735-496 68-514-822
CC-6	32" [81,3 cm]	43" [109,2 cm]	3.0" [7,6 cm]	92.5 gal. [350.2 L]	2.5" ID 2.875" OD	CC-6	61-556-261 92-701-674

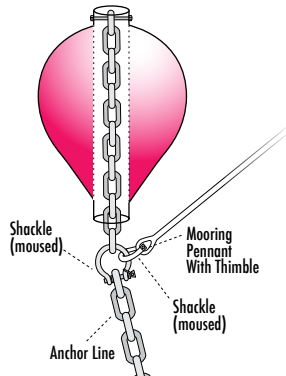

When using the CC Series as a mooring buoy, please follow these simple instructions to achieve the maximum use and durability of this product:

- 1) The CC Series has a flexible center tube. If you use a chain, you must first insert a rigid PVC pipe. (See chart) DO NOT inflate the buoy until you have inserted the pipe.
- 2) Lubricate with oil both the tube and the pipe prior to inserting. Make the length of the pipe so that you have 3 inches extending beyond the top and bottom of the buoy.
- 3) Run a suitable size pin for your load through the top of the pipe and attach the shackle to the chain at the bottom of the buoy.



## S SERIES

Small boat fender  
 AWSA approved boat guide marker  
 Marker for small lobster or crab pots

- Even wall thickness for maximum strength and durability
- Reinforced ropehold
- Polyform's unique vinyl valve system

	DIAMETER	LENGTH	EYE DIAMETER	VOLUME
S-1	6" [15,2 cm]	15" [38,1 cm]	0.5" [1,3 cm]	1.6 gal. [6.1 L]

### STANDARD COLOR SKUS

	WHITE	BLUE	GREEN	YELLOW	RED
S-1	15-560-347	49-697-923	63-852-761	55-948-800	63-108-344



Made in the USA

# BUOYS

Soft, non-marring mooring buoy  
 Choice of vinyl-protected galvanized  
 or stainless steel iron

## CM SERIES



The CM Series is available in solid red or white with a blue stripe.

- Mooring iron made with vinyl-protected galvanized or stainless steel
- Soft vinyl surface protects boat finishes
- Even wall thickness for maximum strength and durability
- Limited three year warranty


	DIAMETER	LENGTH	TUBE DIAMETER	VOLUME	IRON LENGTHW/SHACKLE
CM-2	13.5" [34,3 cm]	18" [45,7 cm]	0.625" [1,6 cm]	6.6 gal. [24.8 L]	31" [78,7 cm]
CM-3	17" [43,2 cm]	22" [55,9 cm]	0.625" [1,6 cm]	11.8 gal. [44.8 L]	35" [88,9 cm]

To figure out what size buoy you will need, determine the weight of the chain it must support. All chain has a stated weight per foot. Add another 25% to the total weight for safety. Always use chafing gear where mooring lines run through bow chocks or are likely to contact deck hardware. A thimble on the shackled end will prevent chafe at the buoy.

### STANDARD COLOR SKUS

	WHITE WITH BLUE STRIPE	RED
CM-2 GALV	74-588-558	35-255-850
CM-2 SS	77-566-577	04-411-454
CM-3 GALV	86-185-752	65-070-333
CM-3 SS	20-570-309	62-652-316

In a hard blow, the holding power of the mooring can be increased by lengthening the mooring pennant. This increases the scope of the mooring providing greater holding power—just be sure to check other boats in the moorage first to ensure you won't foul another moored boat. In adverse conditions, a second mooring pennant can be run to the top eye as a safety in case the primary pennant chafes through or fails. All shackles should be moused to prevent opening. Electricians plastic tie wraps are an excellent means of securing a shackle.

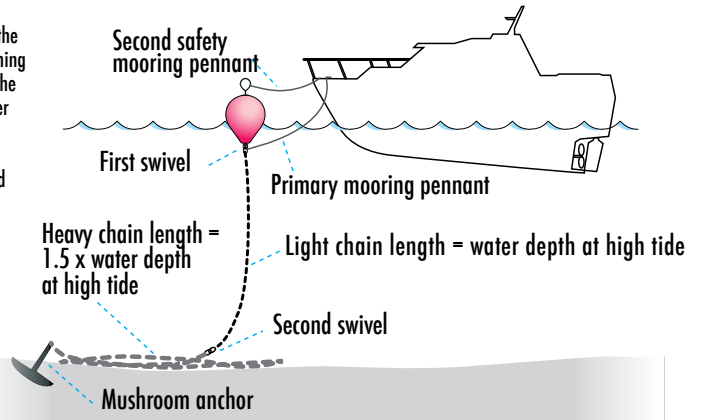

Meets official American Water Ski Association specifications for record capability tournaments

Multiple colors to mark both ski and boat courses

IMPORTED

## WS SERIES



- High quality PVC construction
- Reinforced ropehold

	DIAMETER	LENGTH	EYE DIAMETER	VOLUME
WS-I	8" [20,3 cm]	8.5" [21,6 cm]	0.375" [1,0 cm]	1.6 gal. [6.1 L]

### STANDARD COLOR SKUS

	GREEN	YELLOW	ORANGE	RED
WS-I	27-411-191	18-314-701	96-857-540	28-539-331